

Policy guidance for identifying and effectively managing perpetual environmental impacts from new hardrock mines

Houston Kempton^{1*}, Thomas A. Bloomfield², Jason L. Hanson³, and Patty Limerick³

Full citation: Kempton, H., Bloomfield, T.A., Hanson, J.L., and Limerick, P. 2010. Policy guidance for identifying and effectively managing perpetual environmental impacts from new hardrock mines. *Environmental Science & Policy*, Volume 13, Issue 6, October 2010, Pages 558-566. Final journal version available at: <http://dx.doi.org/10.1016/j.envsci.2010.06.001>.

Note: This authors' version of the article includes changes made in response to peer reviewer comments, the supplemental material cited in the journal version, and two figures not in the journal version. It does not incorporate the final revisions from the journal editors.

ABSTRACT

Perpetual environmental management at operating and proposed hardrock mines is a rapidly expanding global dilemma. While economies of scale have encouraged larger mines, improved models routinely predict long-term water quality degradation at sulfide metal mines. Technical causes include oxidation of sulfide minerals and seepage from waste rock, tailings, and pit wall rock. Perpetual treatment is usually less expensive than permanent stabilization, even using 2% "risk free" investment return rate; but this option greatly increases the social and financial complexity. A few regulations address perpetual management, but specific requirements range from formal acceptance to complete prohibition. With vague regulations, predictions of long-term impacts often delay permitting as operators and regulators grapple with model uncertainty and regulatory ambiguity. Risk management tools (e.g., insurance, inflation protected investments, etc.) can reduce but cannot eliminate risk, and their continued availability is uncertain. What regulators and mine operators need – but do not have – is a clear framework to guide them in developing perpetual management plans that balance risks (e.g., uncertainty in predictions, cost, finance, and governance) and ensure responsible environmental and social stewardship. This paper responds with a review of perpetual mine management issues, including technical causes, policy examples, investment tools, case studies, technical remedies, and principles for successful long-term management.

Key Words: Acid rock drainage, long-term, perpetual mine management, mining, trust fund, bond, sustainable development, closure.

¹ Watershed Environmental, LLC, Boulder, Colorado, USA; houston.kempton@gmail.com

² Gallagher & Gallagher, a Professional Corporation. Boulder, Colorado, USA
tbloomfield@thegallaghergroup.com

³ Center of the American West, University of Colorado, Boulder, Colorado, USA; info@centerwest.org

* Corresponding Author – Email: houston.kempton@gmail.com / Tel.: 011.303.492.4879 / Fax: 011.303.492.1671
Mail: Center of the American West, 282 UCB, University of Colorado, Boulder, CO 80309-0282, USA.

INTRODUCTION

In the 40 years since the United States began requiring Environmental Impact Statements for disturbances on public lands, environmental analyses have determined with increasing certainty that many (and maybe most) new hardrock mines in sulfide rock will require continuous management to prevent perpetual water quality degradation. The primary cause of the degradation – oxidation of sulfide minerals in exposed rock and mine waste – is well understood. Yet after decades of committed research, affordable remedies remain elusive. The root cause of long-term contaminant leaching is the high mobility of atmospheric oxygen. Unless the spoils of mining – waste rock, tailings, and the walls of pits and tunnels – are permanently submerged under water, oxygen reaches and reacts with the excavated metal sulfides, producing long-term release of sulfate, acidity, and various metals and metalloids. Designs that permanently isolate mine waste from water or oxygen exist, but remain undemonstrated at full scale. Physical management of waste poses important secondary concerns, including steep-walled pits and resulting pit lakes that may remain attractive nuisances, and tailings (the crushed remnants of processed ore) in dammed impoundments, which are destined to eventually load particulate metals to surface waters unless the earthen dams are maintained perpetually.

A prediction of perpetual management presents the mine operator, regulators, and stakeholders with multiple complex decisions. How reliable are the predictions? Would the mine be consistent with sustainable development? Is it legal to allow perpetual treatment? If so, how much will it cost, when should the money be delivered, and how should it be invested? Who should manage the funds? Invariably, predictions of long-term impacts delay permitting as operators and regulators grapple with this model uncertainty and regulatory ambiguity. A framework is beginning to emerge, but a complete strategy for perpetual mine management plans remains unformulated. What regulators and mine operators need is a clear framework to guide them through the gauntlet of technical, permitting, financial, and governance requirements for perpetual post-closure management. We present here a start to such a framework, with reviews of water quality model predictions, relevant laws and policy, case studies, explanation of practical risk management tools, and the emerging technical options for perpetual benign stabilization.

CAUSES OF PERPETUAL IMPACTS FROM HARDROCK MINING

Numerous field studies at operating and recently closed hardrock mines have led to improved models for predicting water quality degradation from mine waste. The predictive framework begins with a conceptual model that describes the contaminant fate and transport effects as they apply to the primary structures of hardrock mine waste – waste rock, tailings, and wall rock in pits and adits. Key components of these models include contaminant release (oxidation), transport (surface or pore-water flow), chemical attenuation (adsorption, precipitation, acid neutralization), and dilution in receiving water. Specific examples then illustrate how specific conditions led to prediction of long-term water quality degradation.

Waste rock. In waste rock, water quality degradation arises when atmospheric oxygen encounters sulfide minerals that are wet enough to support oxidation, and the oxidation products, primarily sulfuric acid and soluble metals, leach to surface or groundwater by runoff or percolating pore-water. The contaminant load from waste rock thus depends on the oxidation rate (a function of pore-gas oxygen concentration, temperature, fragment size, sulfide-

mineral surface area, pore-water chemistry, biological activity), the rate that contaminants are flushed by flowing pore-water, and chemical attenuation effects (precipitation and adsorption; Lefebvre et al., 2001, Malmstrom et al., 2000). Active oxidation in sulfidic waste rock is nearly ubiquitous. Moisture is generally higher than the few weight percent required to sustain oxidation, even in semiarid climates (Swanson et al., 2000; Kempton et al., 1997). And some oxygen always enters the rock – diffusion drives oxygen into waste rock surfaces, and advection near exposed slopes commonly produces widespread oxygenated zones deep into piles (Lefebvre et al., 2001). Specific examples of long-term waste rock impacts from models calibrated to field sites include a prediction of peak metal loading to surface water at an unnamed tropical (1450 mm/yr precipitation) waste-rock and tailings site that is “well above the applicable ‘low-risk’ trigger value” arriving between 150 to 400 years (O’Kane and Wels, 2003), a prediction that metal-laden acid drainage from the copper operation at the Mt. Lyell Mine in Tasmania will continue “for many hundreds of years” (Koehnken et al., 2003), and a post-closure analysis at the Island Copper Mine on Vancouver Island, British Columbia, suggesting that “planning for in-perpetuity costs is essential, and that the concept of financial closure for these mines is unrealistic” (Pierce and Wen, 2006). Impacts on receiving water can be delayed in semiarid climates, where slow unsaturated flow in waste rock can delay for decades the onset of discharge; but oxidation continues in these low-moisture environments, and long-term degradation of receiving waters is still the general outcome (Kempton and Atkins, 2000). More generally, a compilation of US environmental studies identifies several sites (e.g., Golden Sunlight Mine in Montana; Iron Mountain Mine in California; Phoenix Mine in Nevada) with a potential for continued groundwater degradation for thousands of years (Kuipers et al., 2006). Collectively, these predictive studies suggests that sulfide-hosted hardrock mines in general, and acid-generating rock in particular, should be considered as potential sources of long-term water degradation.

Lined heap-leach facilities are special cases of waste rock that may require long-term management. Alkaline cyanide leachates used for gold recovery often contains dissolved anions (e.g., arsenic, selenium, molybdenum, antimony, and cyanide) and cyano-metallic complexes (copper, mercury, cadmium, and zinc; US EPA 1994). And sulfuric-acid heap leaching used on copper ore dissolves numerous heavy metal cations. Water rinsing to remove contaminants generally fails in cyanide heaps because redox and pH shifts resolubilize metals (Bowell et al., 2009), and in all heaps because contaminants slowly diffuse out of fragments. And where residual sulfides remain, heaps may eventually produce acidic effluent. In response, many researchers now suggest that heap leach closure omit pre-closure rinsing and focus instead on minimizing water infiltration while planning for long-term treatment or evaporation of effluent (Miller et al., 1999).

Tailings. Water quality degradation arising from unlined tailings impoundments is complicated by the spatial gradation in fragment sizes and associated distribution of water. During construction, a typical tailings impoundment includes a dam (coarse sand or larger), a beach produced by discharge of tailings slurry (medium sand, grading to finer with distance from the dam), and fine sand to silt and clay slimes farthest from the dam in a layer sufficiently impermeable to maintain an overlying pond. Because the coarse beach must be conductive enough to remain perpetually drained to maintain strength in the dam, unlined tailings facilities typically have a zone of unsaturated sulfide-bearing coarse sand that is open to oxygen diffusion from the surface. After closure, fine saturated tailings under ponds remain effectively isolated from oxygen; but oxygen diffusion into the unsaturated subaerial tailings allows rapid oxidation, typically producing $\sim 10 \text{ kg SO}_4/\text{m}^2/\text{yr}$ or more along with soluble acid and metals

(Nicholson et al., 1995). A coupled model of hydraulic flow and diffusion-limited sulfide oxidation at a semiarid South African tailings facility, where the model benefited from calibration to observed conditions (tailings height = 50 m, sulfide S = 0.89 to 3.8 wt %, oxidation rates from kinetic tests, and moisture content from soil water characteristic curves and climate), predicted concentrated acidic seepage (tens of thousands mg/l SO_4^{2-}) continuing for over 2000 years (Govender et al., 2009).

Pit lakes. Conceptual models of mine pit lake evolution consider water inflow by groundwater and precipitation, solute loading from oxidation of sulfide minerals in wall rock and groundwater inflow, and chemical attenuation by precipitation and adsorption reactions in the lake (Ross, 1992). Perpetual impacts are common when sulfide wall rock remains above the lake surface and provides a long-term source of acid and metals, or when evaporative concentration causes solutes from groundwater to continuously increase. Direct measurements and calibrated oxidation models indicate that oxidation rates in sulfide-bearing pit wall rock ranges from ~1 to several tens of kg $\text{SO}_4/\text{m}^2/\text{yr}$ (Kempton and Atkins, 2009; Fennemore et al., 1997), and blast-induced wall-rock porosity has been found up to 15 m from blast faces (McClosky et al., 2003; Radian, 1997), suggesting that a thick reactive zone can be a large long-term source of solutes to mine lakes. This wall-rock load effect is seen in water quality evolution in the Lone Tree Mine in Nevada, USA, which contained ~20 million m^3 of water in the two years after cessation of mining (based on lake elevation and stage-volume curves; WMC 2004). The pH is 3.1, but total acidity is only ~200 mg/l CaCO_3 , which could be neutralized for \$US0.01/ m^3 in CaO reagent (assuming \$US100/tonne CaO). However, in this and other mine lakes where continuous loads from wall-rock and groundwater accumulate as lake water evaporates, the concentrations of toxic metalloids that remain soluble in alkaline water, such as antimony, arsenic, and selenium, can perpetually increase (Kempton et al., 1997a) and costs to treat for these metals can be many times higher.

EXISTING REGULATIONS FOR PERPETUAL MINE MANAGEMENT

Our discussion of regulations follows from a review of current policies, laws, and guidance, primarily in the US and Canada, that relate directly to perpetual environmental management. It is not an exhaustive review of world law, but does illustrate the range in philosophies with useful exemplars.

Mines are regulated on both the federal and state levels in the US. Owners and operators are ultimately liable for the release of hazardous substances (e.g., under statutes such as the Comprehensive Environmental Response, Compensation and Liability Act [CERCLA or "Superfund"; US EPA, 1986a] and under common law). However, these laws generally fail to adequately protect public assets because remediation costs often greatly exceed the resources available to operators or regulators after the cessation of mining.

Several US government reports document the need for management of perpetual pollution problems, and the deficiencies in the current approaches. A 1997 US EPA report identified acid rock drainage as "the most serious environmental threat of current hardrock mining," noting that some mines "may require water treatment in perpetuity" (USEPA, 1997). Traditional closure activities (e.g., removing structures, reclaiming surfaces, etc.) are guaranteed by operator-funded bonds, and are, ideally, returned shortly after closure. In contrast, trust funds for long-term water treatment are permanent commitments of principal to fund perpetual treatment using after-inflation returns. The US National Research Council's review of US

mining regulations, “Hardrock Mining on Federal Lands” (NRC, 1999), concluded that “there is inadequate consideration of protection of the reclaimed land from future adverse uses [or] of very long-term or perpetual site maintenance;” that “most land agencies do not require bonding for long-term or perpetual treatment of water at mine sites;” and that “if these costs are not assured, the public will eventually incur the costs of long-term water treatment.” Even reports that postdate recent amendments to the mining regulations continue to identify problems with the current approach. A 2005 report from the US Government Accountability Office found that “financial assurances were not adequate to pay all estimated costs for required reclamation for 25 of the 48 operations,” and that “cost estimates may be understated for about half of the remaining 23 operations” (GAO, 2005). The GAO recommendations include placing mine closure funds in a trust accounts that “accrue sufficient funds to be sustained in perpetuity.” Based in part on concern over estimated total cleanup liability at US hardrock mines (US\$20 billion to US\$54 billion), the US EPA began the process in 2009 to establish federal financial assurance requirements for hardrock mining on all US lands, pursuant to section 108(b) of CERCLA (US EPA 2009).

Several US laws seek to address contamination in a prospective manner. Examples include the Federal Clean Water Act (establishing drinking water standards for surface and groundwater and regulating point source discharges to surface water; US EPA, 1977), the Emergency Planning and Right to Know Act (requiring disclosures about hazardous substances; US EPA, 1986b), and the Safe Drinking Water Act (regulating certain discharges to groundwater and setting drinking water standards; US CFR, 1974 and US EPA, 1996). Most specific in addressing long-term impacts is the National Environmental Policy Act (NEPA), which requires Environmental Impact Statements (EISs) for disturbances on public lands that include disclosure of “direct effects” and “indirect effects . . . later in time . . . but still reasonably foreseeable”; discussion of “the relation between local short-term use . . . and the maintenance and enhancement of . . . long-term productivity”; and consideration of how a project would “fulfill the responsibilities of each generation as trustee of the environment for succeeding generations” (CEQ, 1970).

More recent rules have begun to address post-closure requirements at mine sites. Current US regulations for mining on Bureau of Land Management (BLM) property addressed earlier criticisms (NRC, 1999), and now require, if necessary, “a trust fund or other funding mechanism available to BLM to ensure the continuation of long-term treatment to achieve water quality standards and for other long-term, post-mining maintenance requirements . . . for as long as the treatment and facilities are needed after mine closure” (BLM, 2006a). (Draft regulations had prohibited new mines that would require permanent water treatment, but BLM deleted that provision due to the difficulty of determining “in advance when permanent treatment will be necessary” and concern that it would have “the unintended effect of encouraging prospective operators to claim that permanent treatment would not be necessary when, in fact, it would,” BLM, 1999). Specific to the US State of Nevada, federal “guiding principles for long-term (post-mining) trust documents” require that trusts cover “all anticipated post-closure costs,” but explicitly requires that funds not be based on “worst-case” scenarios (BLM, 2005). These long-term funding mechanisms require operator estimates for the cost, timing, and duration of future expenditures, and government assessment of fund adequacy before mine closure and every 3 years after (BLM, 2006b).

Several US state laws are noteworthy for locally restricting mines that will produce perpetual pollution. New Mexico and Michigan effectively prohibit mines that will require perpetual

management (New Mexico, 2009; Michigan 2004), and Wisconsin prohibits mining sulfide rock until a US or Canadian mine in acid-generating rock has been operated and closed for 10 years without causing “pollution of groundwater or surface water from acid . . . or the release of heavy metals” (Wisconsin, 1998).

The mining regulations in Saskatchewan, Canada, appear to have the most comprehensive planning for perpetual management, and suggest a belief that the government – not an individual mining company – is best suited to manage the risk of perpetual mine management. Mine operators are required to complete the province's environmental assessment process, create a decommissioning and reclamation plan, and then post funds sufficient for complete decommissioning and reclamation in a form that is held by government (typically a letter of credit posted by a financial institution). After closure, the government has a program to accept responsibility for land that “requires long-term monitoring and . . . maintenance” under the Institutional Control Program (ICP, which is a plan to track and manage waste after a project's closure [Saskatchewan, 2006]). The ICP requires operators to submit: (1) A detailed plan for long-term post-closure monitoring and maintenance for the site, and (2) “A contribution to the Institutional Control Monitoring and Maintenance Fund (ICMMF) [that] must be of a value to generate revenue sufficient to pay those future costs in perpetuity” (Saskatchewan, 2008). Net yields on perpetual funds are based on the difference between the return on government bonds and inflation, typically ~2% per year. This law requires that involved parties mutually agree to financial assumptions, but does not include risk management plans to limit costs and guarantee fund growth. Risk from management costs are reduced, however, by delaying acceptance of a mine into the ICP program until it has been closed and monitored for 10 years to identify water-quality trends, and by denying entry for sites where water quality is trending worse (Cunningham, 2009). The government registry then conducts the monitoring and maintenance, and the funds are “managed by the province.” To allay operator concerns over the security of financial allocations to specific sites, funds are held in commercial banks and “legislated and stand alone from provincial revenue.” This regulation explicitly identifies the value of unambiguous requirements to all stakeholders, noting that this ICP “forms an integral part of the province's response to industry requirement for clarity in the investment climate and acceptance of safety and environmental responsibility of a sustainable mining industry to protect future generations.”

This Saskatchewan program is young, with only 6 sites accepted to date, none of which required active treatment to meet the surface water standards in receiving water; However, as many as 10 active projects run by private operators are on track to enter the program in the next 5 years, which should provide experience with costing and managing more complex projects (Cunningham, 2009).

On a global scale, the International Finance Corporation's updated “Environmental, Health and Safety Guidelines for Mining” (IFC, 2007) addresses perpetual treatment only implicitly, requiring their collaborators to manage actual or potential ARD “for as long as there is a need to maintain effluent quality to the levels required to protect the local environment, and, if necessary, into the decommissioning, closure, and post-closure phases of the mine.” A World Bank working paper on financial surety for mine closure (the IFC is a member of the World Bank) recognizes that some sites will require “long-term care and/or remedial action,” and that these should have a separate fund that is “self-perpetuating so that the regulatory authority is never left with a deficit” (Sassoon 2009). But this report also recognizes that there is “considerable ambiguity surrounding the issue of the funding of long-term care of the site, or

what time period the financial surety should cover after the rehabilitation work has been completed."

A FRAMEWORK FOR PERPETUAL MINE MANAGEMENT

Toward the development of a more consistent framework, we describe below the critical components for effectively planning perpetual management of today's mines.

Technical factors affecting post-closure management costs. Cost estimates for active treatment of existing ARD flows are usually well constrained by physical ranges on concentration and flow (e.g., the actual water treatment costs at the Zortman-Landusky Mine in Montana between year 2000 and 2009 varied only by $\sim \pm 13\%$, from US\$734,000 to US\$950,000/yr; McCullough, 2005, and personal communication from McCullough in 2010). Passive or semipassive technologies for mine water management, such as in-situ sulfate reduction within aquifers using permeable reactive barriers or carbohydrate injection, offer lower cost treatments. But uncertainty in critical parameters, particularly system life, produce long-term cost estimates that range by factors of 2 to 8 (Martin et al., 2003), highlighting the need for more research into these technologies.

In contrast, the cost estimates for perpetual post-closure mine water treatment have large uncertainty, particularly when required before mining has even begun. Some of the physical factors affecting actual post-closure costs include geographic scope and nature of the ultimate disturbance, reclamation effectiveness, the concentrations and volume of the effluent, climate variability, climate change, and the nature of affected resources. Reliance on model predictions greatly increases uncertainty, particularly in fracture-flow environments. More generally, future costs are uncertain – technological innovations may reduce future costs, while external costs (e.g., changes in energy costs or regulations) could increase future costs. Thus standard engineering contingencies used to estimate mine reclamation costs, which typically involve more predictable costs such as earth moving, are inadequate for accommodating the large uncertainty in estimates of post-closure treatment costs that use predictive models. Given the long time period, it is also generally appropriate to assume government contracting costs, which are higher than costs if mining companies undertake the construction themselves. These uncertainties can be addressed by adding conservative contingency costs to scope, design, and construction estimates. However, a diverse alliance of stakeholders have cause to resist the large financial assurance that adequately covers the large uncertainty in perpetual treatment. For operators, the additional expense complicates project financing; for politicians, operating mines bring jobs and tax revenues; and for insurers, litigation may be less expensive than funding treatment under conditions that were unforeseen when the original policies were created. A partial solution is commitment to periodic refinement of surety bonds using experience gained as the project proceeds (e.g., the US State of Montana requires that closure bond estimates be updated annually and reviewed comprehensively every 5 years; Montana 2009).

Investment and inflation assumptions affecting post-closure management costs. Under the long time periods typical of mining, where management may not begin for decades, but could then persist for hundreds or thousands of years (Kempton and Atkins, 2000), the estimate for the initial capital investment is extremely sensitive to the assumed rate of return. Not surprisingly, long-term model-based forecasts that include financial assumptions can vary enormously. The fund for perpetual water treatment at the Newmont Phoenix Project in Nevada, USA, is an apt example (Figure 1). In this example, the estimated net-present values

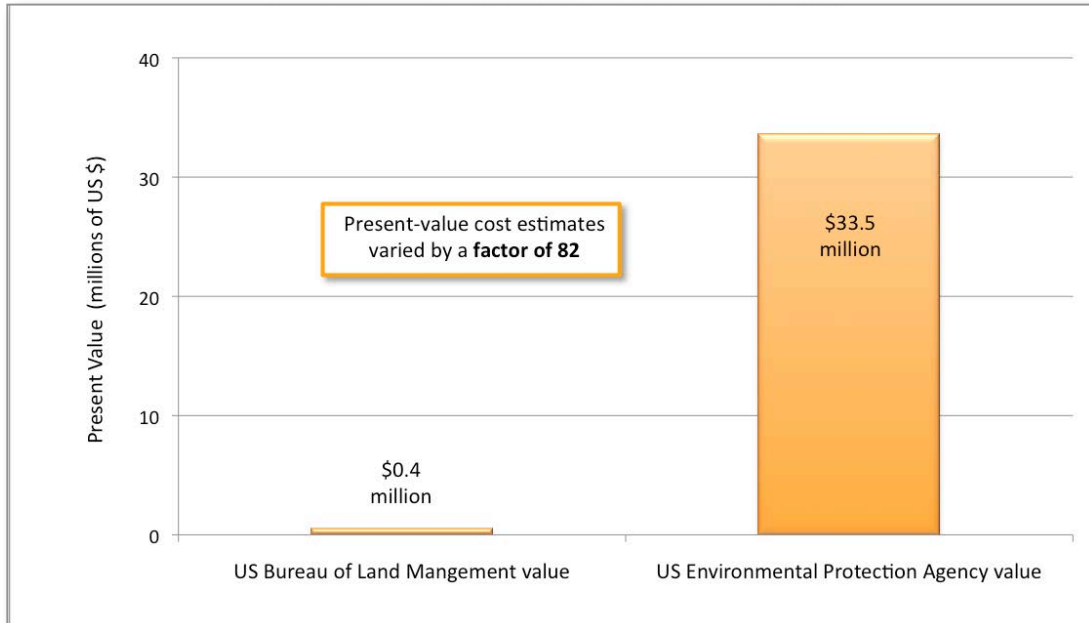


Figure 1. The estimates for net-present value of perpetual water treatment at the Newmont Phoenix Project (Nevada, USA) ranged a factor of 82 among government agencies – from US\$0.4 million to US\$33.5 million.

ranged by a factor of 82 (US\$408,000 by the BLM to US\$33.5 million by the EPA, with the disparity caused by differences in discount rates (6.5% real by BLM and 2% real by EPA), pricing of post-closure components (e.g. lime treatment plant at US\$2 million by BLM and US\$6.7 million by EPA) and mark-ups for contingencies and third-party contracting (US EPA 2002).

The real return rate on these funds must take into account the estimated return on investment, inflation, taxes and investment expenses. A 2% “risk-free” net rate of return (i.e. after interest but excluding taxes or fees) is a good first estimate for fund growth (Davis, 2000). This is generally consistent with historic yield on US Treasury-backed Treasury Inflation-Protected Securities (TIPS), which provide a guaranteed rate of return over inflation (recent yields ~1% to 2%, though rates have been higher in the past), and with the net return of 1.4% estimated in the Saskatchewan Institutional Control Program using inflation and bond yields in 2007 (Saskatchewan 2008). The BLM’s long-term fund for the Barrick Gold, Inc. Betze Pit in Nevada, USA, grew from US\$1 million in 1991 to ~US\$2.2 million in 2009 (Laird, 2009), which equates to a net return of ~5%, or ~2.5% net after inflation. The US Office of Management and Budget Circular A-94 provides annual estimates for long-term real (after inflation) and nominal discount rates for cost benefit analysis (but not public investments). The OMB rates for 2010 ranged from 0.9% to 2.7% real (OMB 2009).

Other investment options include: (1) federal, state or municipal securities (including tax-free instruments); (2) insurance instruments such as Guaranteed Investment Contracts (GICs) or annuities; (3) private bonds or bond funds; and (4) equities (stocks). Each of these instruments offers potentially higher rates of return but at higher risk, and they usually do not include express inflation protection. US equities have generally produced higher inflation-adjusted returns over a 30-year period than other instruments, but can lose real and nominal value in

many years. In addition, the timing of a severe market failure (such as occurred in 2008) might coincide with the time that funds are needed to implement the post-closure remedy. These periods of economic recession can persist for several years, consuming principal and leaving projects severely underfunded. Conversely, low returns on secure government bonds could leave projects underfunded. Modern portfolio theory and the prudent investor rule can be applied to create a mix of investments, based on project needs, timing and risk tolerance; however, that approach is usually not acceptable for funds owned by the government. Inflation is also a significant risk, particularly because inflation is autocorrelated in time and the effect compounds. While inflation in the United States has averaged ~ 4% since 1945 (and 2% more recently), a period of high inflation could severely increase the future maintenance costs beyond predictions based on average inflation. One approach to overcoming these uncertainties is to permit the operator to assume a higher rate of return (and thus a lower initial capitalization value), but with a contingency (also guaranteed by appropriate financial backing) to augment the fund during the investment period if that higher investment return is not met. A 2009 World Bank working paper describes the various surety mechanisms applied to mining projects, and summarizes regulations and tax implications for mine-closure surety in 8 regions (Ontario, Canada; Nevada, USA; Queensland, Australia; Botswana; Ghana; Papua New Guinea; South Africa; Sweden; and European Union) (Sassoon 2009).

Finally, the rate of return can be affected dramatically by fees and taxes. Fees are nominal for larger investments, but taxes on funds can significantly reduce growth if the trust is obligated to pay the taxes (in some instances, the taxes can be passed through to the grantor of the trust, but problems can arise if the grantor is unable to pay those expenses). US tax law includes a provision for a "468B Settlement Trust," which allows the grantor to deduct the initial deposit and allows the fund to grow tax free, provided that certain conditions are met in creating the trust (including that the grantor surrenders claims on the funds; IRS, 2006). Superimposed on the tax implications is the stakeholders' decision as to whether funds are paid up front, or in stages while the mine is being developed.

Robust Legal Structure. Perpetual post-closure mine management requires a robust and durable legal structure to ensure that the funds are invested, managed and spent responsibly over decades or centuries. Each case will require project tracking over time and a structure of checks and balances to discourage misappropriation of funds. For example, with a private agency as trustee and a governmental agency as the beneficiary, the trustee owes a fiduciary duty to the beneficiary, and the beneficiary would monitor the trustee decisions. (In practice, government agencies are not generally set up to monitor those activities and manage finances, so additional care is needed to ensure long-term stewardship.) The cost of the structure must be funded as part of the trust. Other options for the decision-maker include a regulatory or mining agency, a local government, a state, a private trustee, university, mining company, or nonprofit environmental land trust or similar organization. Alternatively, legislation can be created to facilitate these structures, such as the approach used in Saskatchewan, Canada, or the US Nuclear Decommissioning Trust (discussed below). Finally, application of an adaptive management philosophy can be a long-term benefit, allowing continued evaluation of developing technologies and, ideally, eventually eliminating the need for long-term management.

Risk Management Tools. Uncertainties associated with long-term mine management include increasing water flow, changing water quality, annual changes in precipitation, site failures, force majeure events (e.g., slope failures, earthquakes, fires), and changes in labor and material

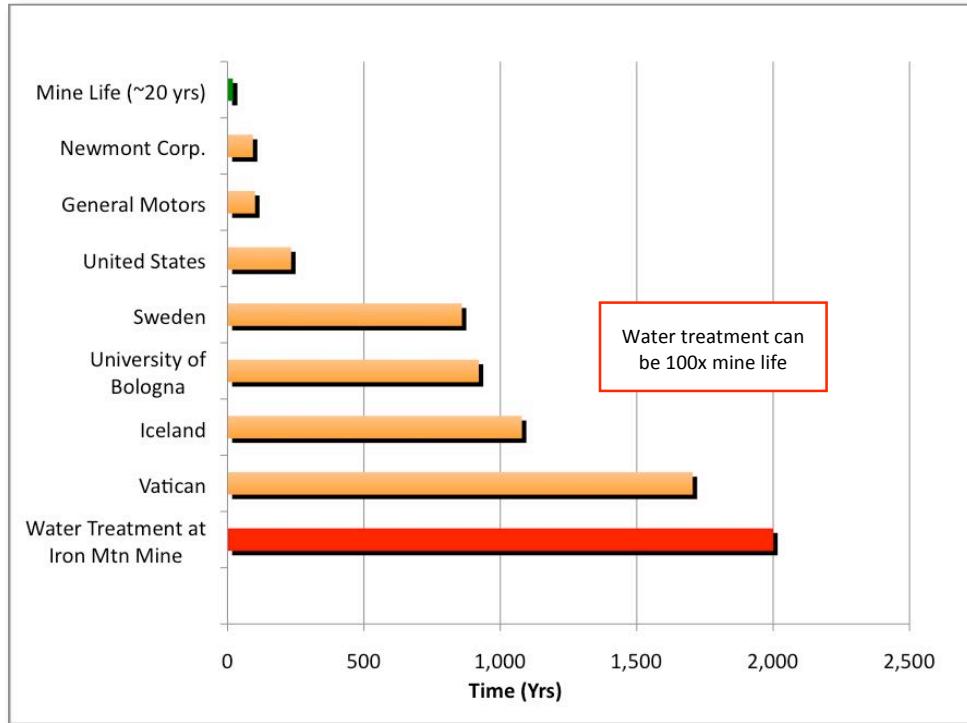


Figure 2. The duration expected for water treatment at hard rock mines (2000 years at the Iron Mountain Mine, California, USA) can exceed the demonstrated durability of all human institutions.

costs (e.g., electricity, lime). To this must be added legal liability risks, such as changing discharge targets or unforeseen litigation. Environmental insurance tools that address these risks include cost-cap insurance (which pays for cost overruns within the limits and terms of the policy), pollution legal liability insurance (which can protect the trust from lawsuits by third parties), and finite risk policies (which combine financial management, payment-timing risk, cost-cap insurance, and pollution legal liability insurance). These are useful tools, particularly before a project is fully capitalized, to manage risk, but they have important limitations, particularly for projects extending beyond 10 years. Further, these products are relatively new compared to most types of insurance, are less regulated than traditional insurance products, and are currently in a state of flux due to the financial markets' turmoil. Their continued existence over the next several decades is uncertain.

Identifying Durable Institutions. A search for existing institutions capable of providing long-term mine management is not encouraging (Figure 2). Most corporations have existed for far fewer than 100 years, and few modern governments have operated for more than 200 years. Long-term government programs, like US social security (itself less than a century old and not certain to reach its 100th anniversary), are currently underfunded, and highlight the difficulties of setting aside money today for future liabilities. Institutions of higher education and religion have proven more durable. The Universities of Bologna, Paris, and Oxford have each operated continuously since their origination in the 11th and 12th centuries; and the Catholic Church has maintained its central institutional authority since at least the 5th century (Bokenkotter, 2004). These venerable institutions are tempting models for stewards of perpetual management

planning as they have demonstrated flexibility while staying on mission. But the range of stakeholders and management structures in churches and universities will be difficult to recreate for institutions designed to manage mine pollution.

Looking forward, the US Nuclear Decommissioning Trusts may be the most apt analog. These require the nuclear power industry to fund trusts “to provide greater assurance that an adequate amount of decommissioning funds will be available” (NRC, 2003). Given the long time periods required, some form of government stewardship will likely be required, but that oversight will need to be structured in a manner that ensures the funds are invested and available for their intended purpose, and that appropriate decisions are made with respect to the use of the funds.

CASE STUDIES: SUCCESS AND FAILURE IN PERPETUAL MANAGEMENT

Zortman-Landusky Mine – Still paying for inadequate funding design. The bankrupt Zortman-Landusky Mine in Montana, USA, is a particularly useful example because the bond structure and causes of cost overruns are well documented (McCullough, 2005; GAO, 2005). Mining began in 1979, reaching sulfide-rock in 1996. A bond for post-closure long-term water treatment (assuming closure in 2017) was established in 1999 as part of a legal settlement redressing water quality violations. Following the operator’s bankruptcy in 1999, the state and the BLM took on water treatment using surety funds, but the project became an example of underfunding caused by inadequate initial assumptions in the 1990s and earlier. Recent projections indicate that cumulative distributions for water treatment will be ~US\$7.5 million short of actual costs by year 2017, after which a US\$34 million trust fund for perpetual treatment (funded in part by the State’s Metalliferous Mines License Tax) becomes available (McCullough, 2005). Key suggestions for improved surety funding include: (1) Collect bond amounts as lump sums for placement in interest-bearing accounts, with immediate access by regulatory agencies; (2) Assume cost variability and avoid line-item cost limitations, which can underfund treatment in high-flow years; (3) Anticipate protracted negotiations or litigation and include funds for managing same; and (4) Calculate net-present value of perpetual treatment on 100-years of operation (McCullough, 2005).

Iron Mountain Mine – So far so good. The Iron Mountain Mine in California, USA, renowned as an extremely concentrated and long-term ARD source (i.e., pH= -3.6 with 200 g/l metals and 760 g/l SO₄, expected to continue for over 2,000 years; Nordstrom et al., 2000), is an exemplar (so far) of successful financial and technical approach for perpetual treatment. This site was mined intermittently from the late 1800s until the 1940s, using both underground and open pit mining methods. Prior to remediation, the site discharged more than a ton of toxic metals each day into the Sacramento River, a spawning ground for a host of endangered species.

Federal and state agencies reached a settlement with the principle responsible party (Aventis CropSciences USA, Inc.) in 2000, then oversaw remediation of the site under the federal Superfund program (US EPA, 2006). The current remedy involves capturing and treating the ARD with a high-density sludge system. After extensive litigation by federal and state regulatory agencies against the former mine owners, the parties reached a settlement that included: (1) a finite risk insurance program coupled with a cost-cap and pollution legal liability program to fund the first 30 years of treatment and site maintenance and other improvements (valued at more than \$300 million); (2) a \$514 million Guaranteed Investment Contract that comes due at year 30, which is projected to be sufficient to fully fund site response costs after

year 30; (3) the hiring of a third party contractor to assume the risk of operating the site for the first 30 years, to be funded through the insurance program held in the 468B Settlement Trust; and (4) joint state and federal decision making for funds after year 30. The robustness of this plan was tested shortly after the settlement when the site operator went bankrupt. A replacement contractor was identified, insurance funds continued through the transition, and that project has worked well to date.

TECHNICAL OPTIONS FOR PERPETUAL STABILIZATION

Ongoing research has identified two options to perpetually stabilize subaerial sulfide mine waste. In semi-arid to temperate climates, an “umbrella design,” constructed using sloped layers of fine material within coarser mine waste, has been proposed as a method to permanently divert unsaturated water flow around net-acid-generating rock within waste facilities (Barbour, 2000; Wilson et al., 2000a). Alternatively, layers that blend tailing and waste-rock (~1/3 tailings and 2/3 waste rock) produces a material with sheer strength comparable to waste rock alone but that can retain enough moisture to impede oxygen flow (Wilson et al, 2000b; Wilson et al., 2006). Both of these technologies still need full scale testing to refine design costs and demonstrate long-term effectiveness.

GUIDANCE FOR IDENTIFYING AND PLANNING FOR PERPETUAL MINE MANAGEMENT

Technical studies at existing and proposed mines point clearly to a short list of critical parameters that, if present, identify mines as potential candidates for perpetual management: (1) Sulfide-minerals, which are primary sources of acidity and metals, in rock stored above the water table. (Excess neutralization greatly reduces concentration of sulfate and most metals in effluent, but does not eliminate potential for perpetual impacts.) (2) Potential for release of metals with high toxicity to site-specific receptors (e.g., arsenic, which is a human carcinogen, released to potential drinking water; or mercury, which can bioconcentrate dramatically in mine lakes). (3) Tailings impoundments, which can leach solutes and generally require perpetual, if infrequent, dam management. (4) “Terminal” pit lakes (i.e., net evaporative lakes or wetlands), where solute concentrations increase perpetually, eventually exceeding risk-based thresholds. Mines with any of these conditions place a burden on the proponent to provide quantitative analysis of perpetual effects on water quality.

Finally, responsible stewardship of mining projects that anticipate long-term release of contaminants will require a detailed post-closure management plan that addresses explicitly the challenges in guaranteeing perpetual active treatment. The collective experience from analogous projects suggests that these perpetual management plans consider, at a minimum, an engineering cost estimate for implementing treatment, a financial plan to manage growth of funds for long-term, a robust legal structure to ensure appropriate financial and legal decision-making, and a risk management vehicle to reduce uncertainty inherent in maintaining environmental compliance beyond the duration of most existing human institutions. In the spirit of adaptive management, closure planning during and after mine operation would benefit from allocating some funds to field-scale tests that evaluate the feasibility of promising perpetual stabilization technologies.

ACKNOWLEDGMENT

The authors thank the two technical reviewers from *Environmental Science and Policy* for their time and extremely helpful suggestions.

ABOUT THE AUTHORS

Mr. Houston Kempton is an environmental chemist at Watershed Consulting Inc. in Boulder, Colorado. He has 20 years of experience, specializing in environmental geochemistry and hydrogeology related to modeling the mobility and removal of metals at hard-rock mines. His recent research has focused on policy issues related to prediction and permitting of mines predicted to require long-term post-closure management.

Mr. Tom Bloomfield is an attorney with Gallagher and Gallagher, LLP in Boulder, Colorado. His expertise includes legal analysis related to environmental issues at operating and abandoned mines, and the design and implementation of environmental management plans that combine tools from finance, law, and insurance to optimize cost and reliability.

Mr. Jason L. Hanson is an environmental historian and research associate at the Center of the American West in Boulder, Colorado. His recent research and publications are related to environmental and social impacts associated with large reservoirs, abandoned mines, and oil shale development in the western US.

Dr. Patty Limerick is the Faculty Director and Chair of the Board of the Center of the American West at the University of Colorado in Boulder, Colorado. She is a historian specializing in the American West who applies historical perspective to contemporary concerns in ways that bridge the gap between academics and the general public, while inviting traditional opponents and adversaries to work together in common enterprises.

REFERENCES

- Barbour, L., 2000. Concept presented in "Understanding waste rock facilities in dry and wet climates," Short Course, Fifth International Conference on Acid Rock Drainage, Denver, CO, Society for Mining, Metallurgy and Exploration Inc., 2000.
- BLM, 2006a. US Code of Federal Regulations - Title 43: Public Lands: Interior. 43 CFR § 3809.552c http://edocketaccess.gpo.gov/cfr_2006/octqtr/pdf/43cfr3809.552.pdf.
- BLM, 2006b. Guidelines for Reviewing Reclamation Cost Estimates, Attachment 1-1 of Reclamation Cost Estimates for Notices and Plans of Operations, US Bureau of Land Management, EMS TRANSMISSION 04/20/2006.
http://www.blm.gov/pgdata/etc/medialib/blm/wo/Information_Resources_Management/policy/im_attachments/2006.Par.8378.File.dat/im2006-135attach1.pdf
- BLM, 2005. Guiding Principles for Long-Term (Post-Mining) Trusts under 43 CFR 3809. Memorandum from Nevada Deputy State Director, Minerals Management, BLM, Jan. 31, 2005.
http://www.blm.gov/pgdata/etc/medialib/blm/nv/information/laws__regs___policies/ibs__ims/2005/ims.Par.65921.File.dat/nvim2005-032.pdf
- BLM, 1999. 43 CFR Part 3800, Mining Claims Under the General Mining

- Bokenkotter, T., 2004. *A Concise History of the Catholic Church*, revised and expanded edition. Doubleday, New York, pp. 84-87.
- Bowell, R.J., J.V. Parshley, G.McClelland, B. Updon, and G. Zhan, 2009. Geochemical evaluation of heap rinsing of the Gold Acres Heap, Cortez joint venture, Nevada. *Minerals Engineering* 22(2009), 477-489.
- Laws: Surface Management; Proposed Rule. *Federal Register* / Vol. 64, No. 26 / Tuesday, February 9, 1999 / Proposed Rules.
http://www.blm.gov/nhp/news/regulatory/3809/43_3809p.pdf
- CEQ, 1970. Regulations for Implementing NEPA, US Council on Environment Quality, Part 1508 (Terminology). http://ceq.hss.doe.gov/nepa/regs/ceq/toc_ceq.htm
- Cunningham, 2009. Personal communication. Keith Cunningham, Senior Industry Analyst, Ministry of Energy and Resources, Saskatchewan, Canada.
- Davis, G. 2000. Project Assessment Methodologies and Measures: The Contribution of Mining Projects to Sustainable Development. In: *Sustainable Development and the Future of Mineral Investment*, edited by James M. Otto and John Cordes. Paris: United Nations Environment Programme (2000), 7.1-7.31.
- Fennemore, G.G., Neller, W. C., and Davis, A., 1998. Modeling Pyrite Oxidation in Arid Environments, *Env. Sci. and Technol.*, 32(18), 2680-2687.
- GAO, 2005. Hardrock mining: BLM Needs to Better Manage Financial Assurances to Guarantee Coverage of Reclamation Costs. Report to the Ranking Minority Member, Committee on Homeland Security and Governmental Affairs, US Senate. U. S. Government Accountability Office. GAO-05-377, June 2005. www.gao.gov/cgi-bin/getrpt?GAO-05-377.
- Govender, K., Bezuidenhout, N., Van Zyl, A., and Rousseau, P, 2009. Prediction of seepage emanating from a TSF in an arid climate. In: *Proceedings of the 8th International Conference on Acid Rock Drainage*, June 23-26, 2009, Skelleftea, Sweden.
- IFC, 2007. Environmental, Health and Safety Guidelines for Mining, International Finance Corporation, World Bank.
[http://www.ifc.org/ifcext/policyreview.nsf/AttachmentsByTitle/EHS_Draft_Mining/\\$FILE/Clean+Draft+Mining+July+9.pdf](http://www.ifc.org/ifcext/policyreview.nsf/AttachmentsByTitle/EHS_Draft_Mining/$FILE/Clean+Draft+Mining+July+9.pdf)
- IRS, 2006. Title 26 – US Internal Revenue Code, Subtitle A (Income Taxes), Chapter 1 (Normal taxes and surtaxes), Subchapter E (Accounting Period and Methods of Accounting), Section 468B. Special rules for designated settlement funds. Laws in effect as of January 3, 2006.
http://frwebgate.access.gpo.gov/cgi-bin/getdoc.cgi?dbname=browse_usc&docid=Cite:+26USC468B
- Kempton, H., and Atkins, D., 2009. Direct Measurement of Sulfide Mineral Oxidation Rates and Acid Rock Drainage in Wall Rock of Open Pit Mines. *8th International Conference on Acid Rock Drainage*, June 23-23, 2009, Skelleftea, Sweden.
- Kempton, J.H., Cook, T.L., Atkins, D., and McHugh, M, 1997. Moisture and salinity limits on pyrite oxidation in semi-arid climates. *4th International Symposium on Environmental Geochemistry*, October 5-10, Vail, CO. USGS Open File Report No. OF97-496.
- Kempton, J.H., Locke, W., Atkins, D., Nicholson, A.D., Bennett, M., Bliss, L., and Maley, P., 1997a. Probabilistic prediction of water quality in the Twin Creeks Mine pit lake, Golconda, Nevada, USA. In: *Proc. Fourth International Conference on Acid Rock Drainage*. May 31–June 6, 1997. Vancouver, British Columbia, Canada.

- Kempton, H., and Atkins, D., 2000. Delayed Environmental Impacts from Mining in Semi-Arid Climates. In: Fifth international Conference on Acid Rock Drainage, Denver, Colorado, Vol II. Soc. For Mining, Metal., and Exploration, May 21-24, 2000. pp. 1299-1308.
- Koehnken, L., Clarke, N., Dineen, R., and Jones, W., 2003. Present Status of Remediation of Mt Lyell Acid Drainage. In: Proceedings of the Sixth International Acid Rock Drainage Conference, July 14 -17, 2003, Cairns, Australia., pp. 65-70.
- Kuipers, J.R., Maest, A.S., MacHardy, K.A., and Lawson, G. 2006. Comparison of Predicted and Actual Water Quality at Hardrock Mines: The reliability of predictions in Environmental Impact Statements. Kuipers & Associates . PO Box 641, Butte, MT USA 59703. <http://www.earthworksaction.org/pubs/ComparisonsReportFinal.pdf>)
- Laird, K., 2009. Personal communication. Bureau of Land Management, Elko, Nevada, US.
- Lefebvre, R., Hockley, D., Smolensky, J., and Gelinias, P., 2001. Multiphase transfer processes in waste rock piles producing acid mine drainage, 1, Conceptual model and system conceptualization. *J. Contam. Hydrol*, 52, pp. 137-164.
- Malmstrom, M.E., Destouni, G., Banwart, S., and Stromberg, B.H.E., 2000. Resolving the Scale-Dependence of Mineral Weathering Rates. *Env. Sci. and Technol.*, 34(7), pp. 1375-1378.
- Martin, T., W. McNab, H. Kempton. 2003. Cost-Benefit Analysis of Sulfide-Based Treatment Technologies for Remediation of Metal-Contaminated Groundwater. In: National Ground Water Association Conference on Remediation: Site Closure and the Total Cost of Clean-up, New Orleans, LA, Nov. 12-14.
- McClosky, L., Wilmoth, R., LeFever, J., and Jordan, D., 2003. Evaluation of technologies to prevent acid mine drainage generation from open pit highwalls. In: Proceedings of the 6th International Conference on Acid Rock Drainage, Cairns, Australia, 14-17 July, 2003, pp. 541-547.
- McCullough, W. 2005. Financial Assurance and Bonding: What Happens When Bankruptcy Hits. In: *Mining in New Mexico – The Environment, Water, Economics, and Sustainable Development, Decision-Makers Field Guide 2005*, pp. 121-124. http://geoinfo.nmt.edu/publications/decisionmakers/2005/DM_2005_Ch3.pdf
- Michigan, 2004. State of Michigan Natural Resources and Environmental Protection Act No. 451 of 1994, Part 632, Nonferrous Metallic Mineral Mining, Sect. 324.63209 “Duties of Permittee” para. 8, (Added 2004, Act 449, Eff. Dec. 27, 2004). <http://www.deq.state.mi.us/documents/deq-ogs-land-mining-metallicmining-lawsandrules-Part632.pdf>.
- Miller, G.C., C. Hoonhout, and W.W. Miller, 1999. Geochemisry of closed heaps: a rational for drainage water quality. In: *Closure, Remediation & Management of Precious Meals Heap Leach Facilities*. D. Dosich and G. Miller, Eds. January 14 – 15, 1999.
- Montana, 2009. Montana Code Annotated 2009, Title 82. Mineral, Oil, and Gas, 82-4-338. Performance Bond , 3(a). <http://data.opi.mt.gov/bills/mca/82/4/82-4-338.htm>.
- Nicholson, R.V., Elberling, B., and Williams, G., 1995. A new oxygen consumption tech-nique to provide rapid assessment of tailings reactivity in the field and the laboratory. In: *Proc. Conf. of Mining and the Environment*. T. Hynes and M. Blanchette (eds.). pp. 999-1006.
- New Mexico, 2009. New mining operations; mining operation permit required. Section 69-36-12 . http://law.justia.com/newmexico/codes/nmrc/jd_69-36-12-19337.html.

- Nordstrom, D.K., Alpers, C. N., Ptacek, C.J., and Blowes, D. W., 2000. Negative pH and Extremely Acidic Mine Waters from Iron Mountain, California. *Env. Sci. & Technol.*, (34), 254-258.
- NRC, 2003. Assuring the Availability of Funds for Decommissioning Nuclear Reactors. US Nuclear Regulatory Commission, Office of Nuclear Regulatory Research, Regulatory Guide, Revision 1 (October 2003). <http://www.nrc.gov/reading-rm/doc-collections/reg-guides/power-reactors/active/01-159/01-159.pdf>
- NRC, 1999. Hardrock Mining on Federal Lands. National Research Council, National Academy Press, Washington, DC, 247p. http://www.nap.edu/catalog.php?record_id=9682
- O'Kane, M, and Wells, C. 2003. Mine Waste Cover System Design – Linking Predicted Performance to Groundwater and Surface Water Impacts. In: Proceedings of the Sixth International Acid Rock Drainage Conference, July 14 -17, 2003, Cairns, Australia, pp. 341-349.
- OMB, 2010. Discount Rates for OMB Circular No. A-94, memorandum from Peter R. Orszag, Director, Executive Office of the President of the United States, Office of Management and Budget, December 8, 2009. http://www.whitehouse.gov/omb/memoranda_default/
- Pierce, G.L., Wen, M.E., 2006. Planning for In-Perpetuity Mine Closure Costs. In: Proceedings of Mine Closure 2006, Australian Centre for Geomechanics, Perth, Australia, Sept 13 – 15, 2006, pp. 487-492.
- Radian, 1997. Predicted water quality in the Betze-Screamer pit lake. Prepared for Barrick Goldstrike Mines, Inc., Elko, NV. Prepared by Radian International.
- Ross, C., 1992. Gold mining affects ground water. *Groundwater Monitoring Review* 12(4), pp. 100-102.
- Saskatchewan, 2006. The Reclaimed Industrial Sites Act, Chapter R-4.21 of The Statutes of Saskatchewan, effective March 1, 2007. <http://www.qp.gov.sk.ca/documents/english/Statutes/Statutes/R4-21.pdf>
- Saskatchewan, 2008. Institutional Control Program Post Closure Management of Decommissioned Mine/Mill Properties Located on Crown Land in Saskatchewan Ministry of Energy and Resources, April 2008. <http://ir.gov.sk.ca/adx/asp/adxGetMedia.aspx?DocID=4819,3630,3385,5460,2936,Documents&MediaID=19543&Filename=RISADiscussionPaperApr1408.pdf>.
- Sassoon, M., 2009. Financial Surety: Guidelines for the Implementation of Financial Surety for Mine Cloures [working paper]. World Bank, Oil, Gas, and Mining Policy Division. http://www-wds.worldbank.org/servlet/main?menuPK=64187510&pagePK=64193027&piPK=64187937&theSitePK=523679&entityID=000333037_20090817003221
- Swanson, D.A., Savci, G., Danziger, G., Williamson, G., and Barnes, C., 2000. Unsaturated hydraulic assessment of waste rock stockpiles in semi-arid climates. In: Proc. Fifth Int. Conf. on Acid Rock Drainage, Denver, USA, May 21-26, 2000, pp. 1273-1282.
- US CFR, 1974. Safe Drinking Water Act. Title 42 – The Public Health and Welfare, Chapter 6A – Public Health Service Subchapter Xii – Safety of Public Water Systems. 42 USC s/s 300f et seq. http://frwebgate.access.gpo.gov/cgi-bin/getdoc.cgi?dbname=browse_usc&docid=Cite:+42USC300f
- US EPA, 1977. The Clean Water Act (CWA); 33 U.S.C. s/s 1251 et seq. (1977) <http://www.epa.gov/compliance/civil/cwa/cwaenfstatreq.html#statute>

- US EPA, 1994. Treatment of Cyanide Heap Leaches and Tailings. US Environmental Protection Agency, Washington, DC, US. EPA530-R-94-037.
<http://www.epa.gov/wastes/nonhaz/industrial/special/mining/techdocs/cyanide.pdf>
- US EPA, 1996. US Safe Drinking Water Act Amendments of 1996.
http://www.epa.gov/ogwdw/sdwa/laws_statutes.html
- US EPA, 1997. EPA Can do More to Help Minimize Hardrock Mining Liabilities. US Environmental Protection Agency, E1DMF6-08-0016-7100223, June 11, 1997.
<http://www.epa.gov/oig/reports/1997/223.htm>
- US EPA, 1986a. Comprehensive Environmental Response, Compensation, and Liability Act, as amended October 17, 1986. <http://www.epa.gov/superfund/policy/sara.htm>
- US EPA, 1986b. Emergency Planning and Community Right-To-Know Act (40 CFR Parts 350-372).
<http://www.epa.gov/oecaagct/lcra.html#Summary%20of%20Emergency%20Planning%20And%20Community%20Right-To-Know%20Act>
- US EPA, 2002. Agency Comments on Phoenix Mine Project Environmental Impact Statement (EIS), Lander County, NV [CEQ #02001], Attachment 1, pp 2-15. Letter from W. Nastri, Regional Administrator, U.S. EPA Region IX, to Robert Abbey, State Director, Bureau of Land Management, November 25, 2002.
- US EPA, 2006. Iron Mountain Mine Case Study: Success Through Planning, Partnerships, and Perseverance. United States Env. Protection Agency, March 7, 2006.
<http://www.epa.gov/superfund/programs/aml/tech/imm.pdf>.
- US EPA, 2009. Identification of Priority Classes of Facilities for Development of CERCLA Section 108(b) Financial Responsibility Requirements. U.S. Federal Register, Vol. 74, No. 143, July 28, 2009, pp. 37213-37218.
http://www.epa.gov/superfund/policy/financialresponsibility/cercla108b_07-10-09.pdf
- Wilson, J.A., G.W. Wilson, and D.G. Fredlund, 2000a. Numerical Modeling of vertical and inclined waste rock layers. In: Proceedings from the fifth international conference on acid rock drainage, Vol. 1., pp. 257-268. Soc. Mining, Metal. and Explor., Inc., Denver, CO.
- Wilson, G.W., L.L. Newman and K.D. Ferguson, 2000b. The co-disposal of waste rock and tailings. In: Proceedings from the fifth international conference on acid rock drainage, Vol. 2., pp. 789-796. Soc. Mining, Metal. and Explor., Inc., Denver, CO.
- Wilson, G.W., J. Miskolczi, A. Dagenais, I. Levesque, Q. Smith, L. Lanteigne, L. Hulett, and D. Landriault, 2006. The application of blended waste rock and tailings for cover systems in mine waste management. In: Proceedings of the 7th International Conference on Acid Rock Drainage. March 26-30, St. Louis, MO, USA, pp. 2424 – 2438.
- Wisconsin, 1998. Moratorium on issuance of permits for mining of sulfide ore bodies, Statute 293.50, Enacted April 22, 1998, State of Wisconsin, US
<http://www.legis.state.wi.us/1997/data/acts/97Act171.pdf>
- WMC, 2004. Lone Tree Pit Lake Optimization Plan Update. Memorandum from Water Management Consultants, Denver, CO, US, to Newmont Mining Corporation. August 13, 2004.